

## LEDVANCE DAMP PROOF LED

### LED damp-proof luminaires



#### Areas of application

- Ideal for industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

#### Product benefits

- Uniform light and wide beam angle
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Easy installation, no tools required for connection
- 5 years guarantee

#### Product features

- Luminous efficacy: 115 lm/W
- Beam angle: 180°
- Type of protection: IP65
- Lifetime (L70/B50): up to 50,000 h (at 25 °C)
- Through wiring possible
- Certificates: CE, CB, TUEV SÜED



# Product family datasheet





## Technical data

	Electrical data				Photometrical data				Light technical data	Dimensions & weight
Product description	Operating mode	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Length
DAMP PROOF LED 1200 21 W 4000 K	Electronic control gear (EVG)	21.00 W	220...240 V	50/60 Hz	4000 K	2400 lm	Cool White	>80	180 °	1200 mm
DAMP PROOF LED 1200 39 W 4000 K	Electronic control gear (EVG)	39.00 W	220...240 V	50/60 Hz	4000 K	4400 lm	Cool White	>80	180 °	1200 mm
DAMP PROOF LED 1200 39 W 6500 K	Electronic control gear (EVG)	39.00 W	220...240 V	50/60 Hz	6500 K	4400 lm	Cool Daylight	>80	180 °	1200 mm
DAMP PROOF LED 1500 30 W 4000 K	Electronic control gear (EVG)	30.00 W	220...240 V	50/60 Hz	4000 K	3500 lm	Cool White	>80	180 °	1500 mm
DAMP PROOF LED 1500 55 W 4000 K	Electronic control gear (EVG)	55.00 W	220...240 V	50/60 Hz	4000 K	6400 lm	Cool White	>80	180 °	1500 mm
DAMP PROOF LED 1500 55 W 6500 K	Electronic control gear (EVG)	55.00 W	220...240 V	50/60 Hz	6500 K	6400 lm	Cool Daylight	>80	180 °	1500 mm

	Colors & materials				Temperatures & operating conditions	Lifespan	Capabilities		Certificates & standards
Product description	Width	Height	Body material	Product color	Ambient temperature range	Lifespan	Dimmable	Type of connection	Protection class
DAMP PROOF LED 1200 21 W 4000 K	95.0 mm	78.0 mm	Polycarbonate (PC)	Gray	-30...40 °C	50000 h	No	Terminal, 3-pin	I
DAMP PROOF LED 1200 39 W 4000 K	95.0 mm	78.0 mm	Polycarbonate (PC)	Gray	-30...40 °C	50000 h	No	Terminal, 3-pin	I
DAMP PROOF LED 1200 39 W 6500 K	95.0 mm	78.0 mm	Polycarbonate (PC)	Gray	-30...40 °C	50000 h	No	Terminal, 3-pin	I
DAMP PROOF LED 1500 30 W 4000 K	95.0 mm	78.0 mm	Polycarbonate (PC)	Gray	-30...40 °C	50000 h	No	Terminal, 3-pin	I
DAMP PROOF LED 1500 55 W 4000 K	95.0 mm	78.0 mm	Polycarbonate (PC)	Gray	-30...40 °C	50000 h	No	Terminal, 3-pin	I
DAMP PROOF LED 1500 55 W 6500 K	95.0 mm	78.0 mm	Polycarbonate (PC)	Gray	-30...40 °C	50000 h	No	Terminal, 3-pin	I

Product family datasheet

Product description	Type of protection
DAMP PROOF LED 1200 21 W 4000 K	IP65
DAMP PROOF LED 1200 39 W 4000 K	IP65
DAMP PROOF LED 1200 39 W 6500 K	IP65
DAMP PROOF LED 1500 30 W 4000 K	IP65
DAMP PROOF LED 1500 55 W 4000 K	IP65
DAMP PROOF LED 1500 55 W 6500 K	IP65

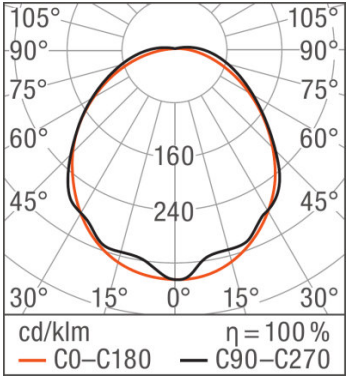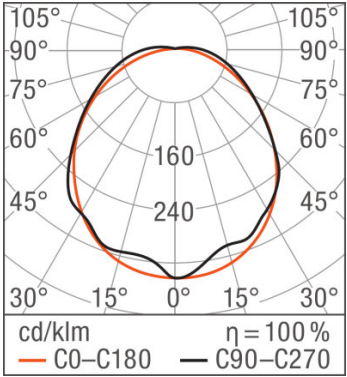


DAMP PROOF LED 1200 21 W 4000 K,  
DAMP PROOF LED 1200 39 W 4000 K,  
DAMP PROOF LED 1200 39 W 6500 K

DAMP PROOF LED 1500 30 W 4000 K,  
DAMP PROOF LED 1500 55 W 4000 K,  
DAMP PROOF LED 1500 55 W 6500 K


DAMP PROOF LED 1200 21 W 4000 K

DAMP PROOF LED 1200 39 W 4000 K

## Product family datasheet

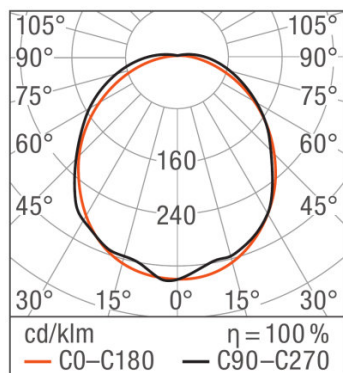

DAMP PROOF LED 1500 30 W 4000 K

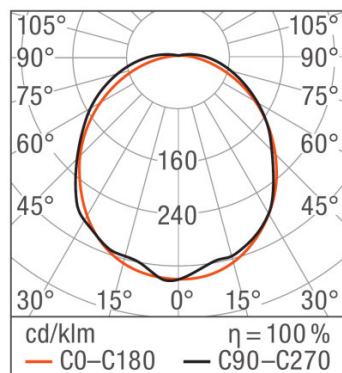

DAMP PROOF LED 1500 55 W 6500 K

### Equipment / Accessories

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

### Application advice

For more detailed application information and graphics please see product datasheet.

### Logistical Data

## Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075000902	DAMP PROOF LED 1200 21 W 4000 K	Shipping carton box 6	1225 mm x 333 mm x 192 mm	78.32 dm <sup>3</sup>	11992.00 g
4058075000926	DAMP PROOF LED 1200 39 W 4000 K	Shipping carton box 6	1225 mm x 333 mm x 192 mm	78.32 dm <sup>3</sup>	11992.00 g
4058075000865	DAMP PROOF LED 1200 39 W 6500 K	Shipping carton box 6	1225 mm x 333 mm x 192 mm	78.32 dm <sup>3</sup>	11992.00 g
4058075000940	DAMP PROOF LED 1500 30 W 4000 K	Shipping carton box 6	1525 mm x 333 mm x 192 mm	97.50 dm <sup>3</sup>	16355.00 g
4058075000964	DAMP PROOF LED 1500 55 W 4000 K	Shipping carton box 6	1525 mm x 333 mm x 192 mm	97.50 dm <sup>3</sup>	16355.00 g
4058075000889	DAMP PROOF LED 1500 55 W 6500 K	Shipping carton box 6	1525 mm x 333 mm x 192 mm	97.50 dm <sup>3</sup>	16355.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.