

PRODUCT FAMILY DATASHEET

LEDVANCE OUTDOOR LED FACADE SPOT

Luminaires with rotatable head and directional light



AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Adjustable modules: rotation angle 320°
- Diffuser made of opal polycarbonate
- Available in two housing colors: white and dark gray




TECHNICAL DATA

	Electrical data	Photometrical data	Light technical data	Dimensions & weight				Colors & materials	Temperatures & operating conditions	Lifespan
Product description	Nominal wattage	Luminous flux	Beam angle	Length	Width	Height	Product weight	Product color	Ambient temperature range	Lifespan L70 at 25 °C
LED FACADE SPOT 8 W 3000 K GY ¹⁾	8.00 W	440 lm	110 °	135.0 mm	90.0 mm	140.0 mm	600.00 g	Gray	-20...40 °C	30000 h
LED FACADE SPOT 8 W 3000 K WT ¹⁾	8.00 W	460 lm	110 °	135.0 mm	90.0 mm	140.0 mm	600.00 g	White	-20...40 °C	30000 h


	Additional product data		Capabilities	Certificates & standards			
Product description	Mounting type	Mounting location	Dimmable	Type of protection	Protection class	Protection class IK (shock resistance)	Photobiological safety group
LED FACADE SPOT 8 W 3000 K GY ¹⁾	Surface	Wall	No	IP54	I	IK06	RG 0
LED FACADE SPOT 8 W 3000 K WT ¹⁾	Surface	Wall	No	IP54	I	IK06	RG 0

Product description	Standards
LED FACADE SPOT 8 W 3000 K GY ¹⁾	CE
LED FACADE SPOT 8 W 3000 K WT ¹⁾	CE

¹⁾ Available from February 2018

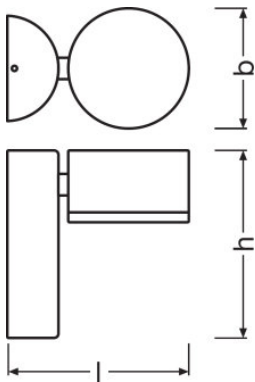

LED FACADE SPOT 8 W 3000 K GY, LED
FACADE SPOT 8 W 3000 K WT

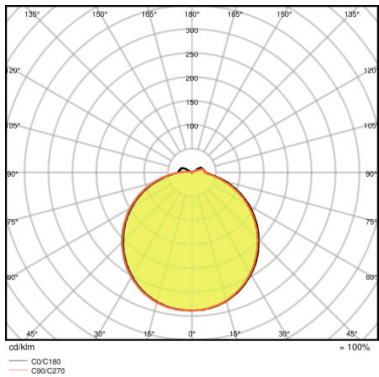

LED FACADE SPOT 8 W 3000 K GY

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075074712	LED FACADE SPOT 8 W 3000 K GY	Shipping carton box 6	385 mm x 170 mm x 355 mm	23.23 dm ³	4072.00 g
4058075074736	LED FACADE SPOT 8 W 3000 K WT	Shipping carton box 6	385 mm x 170 mm x 355 mm	23.23 dm ³	4072.00 g

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
--------------	---------------------	------------------------------	--------------------------------------	--------	--------------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.