
LEDVANCE PANEL LED 600

LED panel luminaires



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Corridors
- Offices
- Conference rooms
- Reception areas
- Foyers
- Elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

Product benefits

- High luminous efficacy
- Energy savings of up to 50 % compared to conventional luminaires
- Easy and quick installation
- Very homogenous light
- 5 years guarantee
- External driver for extended flexibility (compatible with selected DALI drivers)
- Very slim aluminum housing (only 10.5 mm) and matt white frame

Product features

- Type of protection: IP20
- Aluminum housing, polystyrene diffuser
- Ambient temperature in operation: -10...+45 °C
- Lifetime (L70/B50): up to 50,000 h (at 25 °C)
- Certificates: CE, CB, TUEV SUED
- Available with beam angle: 120°, 90° for UGR < 19 according to EN 12464-1



Product family datasheet

Technical data

Product description	Electrical data				Photometrical data				Light technical data	Dimensions & weight
	Operating mode	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	Length
PANEL LED 600 30 W 3000 K	Electronic control gear (EVG)	30.00 W	220...240 V	50/60 Hz	3000 K	3000 lm	Warm White	>80	120 °	595.0 mm
PANEL LED 600 30 W 4000 K	Electronic control gear (EVG)	30.00 W	220...240 V	50/60 Hz	4000 K	3000 lm	Cool White	>80	120 °	595.0 mm
PANEL LED 600 30 W 6500 K	Electronic control gear (EVG)	30.00 W	220...240 V	50/60 Hz	6500 K	3000 lm	Cool Daylight	>80	120 °	595.0 mm
PANEL LED 600 33 W 3000 K	Electronic control gear (EVG)	33.00 W	220...240 V	50/60 Hz	3000 K	3100 lm	Warm White	>80	90.00 °	595.0 mm
PANEL LED 600 33 W 4000 K	Electronic control gear (EVG)	33.00 W	220...240 V	50/60 Hz	4000 K	3600 lm	Cool White	>80	90.00 °	595.0 mm
PANEL LED 600 40 W 3000 K	Electronic control gear (EVG)	40.00 W	220...240 V	50/60 Hz	3000 K	4000 lm	Warm White	>80	120 °	595.0 mm
PANEL LED 600 40 W 4000 K	Electronic control gear (EVG)	40.00 W	220...240 V	50/60 Hz	4000 K	4000 lm	Cool White	>80	120 °	595.0 mm
PANEL LED 600 40 W 6500 K	Electronic control gear (EVG)	40.00 W	220...240 V	50/60 Hz	6500 K	4000 lm	Cool Daylight	>80	120 °	595.0 mm





Product description			Colors & materials			Temperatures & operating conditions	Lifespan	Capabilities	
	Width	Height	Body material	Product color	Cover material	Ambient temperature range	Lifespan	Dimmable	Type of connection
PANEL LED 600 30 W 3000 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin

Product family datasheet

Product description	Width	Height	Colors & materials			Temperatures & operating conditions	Lifespan	Capabilities	
			Body material	Product color	Cover material	Ambient temperature range	Lifespan	Dimmable	Type of connection
PANEL LED 600 30 W 4000 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin
PANEL LED 600 30 W 6500 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin
PANEL LED 600 33 W 3000 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin
PANEL LED 600 33 W 4000 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin
PANEL LED 600 40 W 3000 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin
PANEL LED 600 40 W 4000 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin
PANEL LED 600 40 W 6500 K	595.0 mm	10.5 mm	Aluminum	White	POLYSTYRO(PS)	-10...45 °C	50000 h	No	Terminal, 2-pin

Product description	Certificates & standards	
	Protection class	Type of protection
PANEL LED 600 30 W 3000 K	II	IP20
PANEL LED 600 30 W 4000 K	II	IP20
PANEL LED 600 30 W 6500 K	II	IP20
PANEL LED 600 33 W 3000 K	II	IP20
PANEL LED 600 33 W 4000 K	II	IP20
PANEL LED 600 40 W 3000 K	II	IP20
PANEL LED 600 40 W 4000 K	II	IP20
PANEL LED 600 40 W 6500 K	II	IP20

Product family datasheet

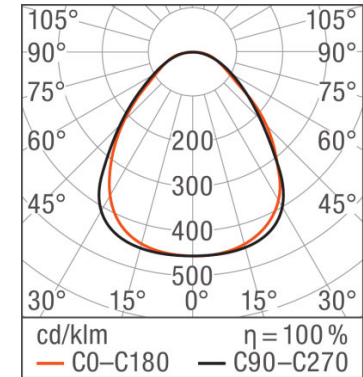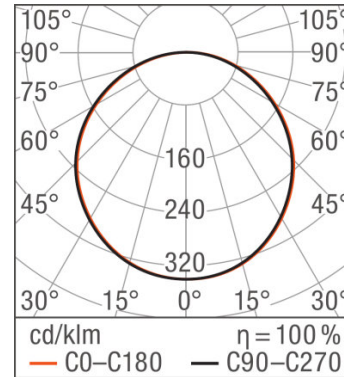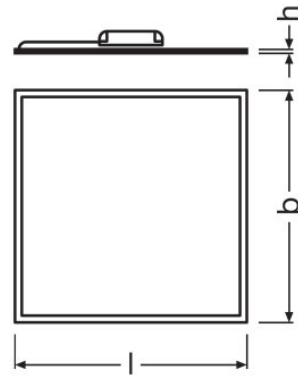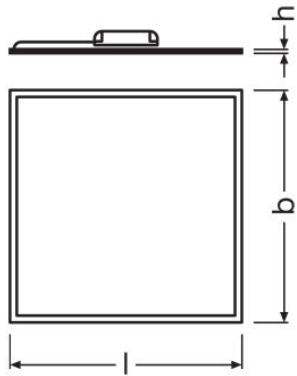


PANEL LED 600 30 W 3000 K, PANEL LED 600 30 W 4000 K, PANEL LED 600 30 W 6500 K, PANEL LED 600 40 W 3000 K, PANEL LED 600 40 W 4000 K, PANEL LED 600 40 W 6500 K

PANEL LED 600 33 W 3000 K, PANEL LED 600 33 W 4000 K

PANEL LED 600 30 W 4000 K

PANEL LED 600 33 W 4000 K

Product family datasheet

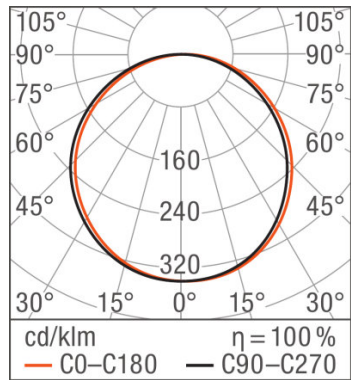

PANEL LED 600 40 W 4000 K

Equipment / Accessories

– Accessories for suspension available

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075000483	PANEL LED 600 30 W 3000 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000506	PANEL LED 600 30 W 4000 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000520	PANEL LED 600 30 W 6500 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000605	PANEL LED 600 33 W 3000 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000629	PANEL LED 600 33 W 4000 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000544	PANEL LED 600 40 W 3000 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000568	PANEL LED 600 40 W 4000 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g
4058075000582	PANEL LED 600 40 W 6500 K	Shipping carton box 4	695 mm x 170 mm x 645 mm	76.21 dm ³	16340.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For Guarantee see

▶ www.ledvance.com/guarantee

Disclaimer

Product family datasheet

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.