

# PRODUCT FAMILY DATASHEET

## LEDVANCE OUTDOOR LED FACADE EDGE

Slim LED luminaires with high light output and optional sensor



---

### AREAS OF APPLICATION

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

---

### PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Homogeneous light output

---

### PRODUCT FEATURES

- Very bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Available with and without motion sensor
- Available in two housing colors: white and dark gray
- Diffuser made of opal polycarbonate with clear glass cover




## TECHNICAL DATA

	Electrical data	Photometric data	Light technical data	Dimensions & weight				Colors & materials	Temperatures & operating conditions	Lifespan
Product description	Nominal wattage	Luminous flux	Beam angle	Length	Width	Height	Product weight	Product color	Ambient temperature range	Lifespan L70 at 25 °C
LED FACADE EDGE 12 W 3000 K GY <sup>1)</sup>	12.00 W	740 lm	110 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	Gray	-20...40 °C	30000 h
LED FACADE EDGE 12 W 3000 K WT <sup>1)</sup>	12.00 W	770 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	White	-20...40 °C	30000 h
LED FACADE EDGE 12 W 3000 K GY SENSOR <sup>1)</sup>	12.20 W	740 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	Gray	-20...40 °C	30000 h
LED FACADE EDGE 12 W 3000 K WT SENSOR <sup>1)</sup>	12.20 W	770 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	White	-20...40 °C	30000 h


	Additional product data		Capabilities	Certificates & standards			
Product description	Mounting type	Mounting location	Dimmable	Type of protection	Protection class	Protection class IK (shock resistance)	Photobiological safety group
LED FACADE EDGE 12 W 3000 K GY <sup>1)</sup>	Surface	Wall	No	IP54	I	IK06	RG 0
LED FACADE EDGE 12 W 3000 K WT <sup>1)</sup>	Surface	Wall	No	IP54	I	IK06	RG 0
LED FACADE EDGE 12 W 3000 K GY SENSOR <sup>1)</sup>	Surface	Wall	No	IP54	I	IK06	RG 0
LED FACADE EDGE 12 W 3000 K WT SENSOR <sup>1)</sup>	Surface	Wall	No	IP54	I	IK06	RG 0

Product description	Standards
LED FACADE EDGE 12 W 3000 K GY <sup>1)</sup>	CE
LED FACADE EDGE 12 W 3000 K WT <sup>1)</sup>	CE
LED FACADE EDGE 12 W 3000 K GY SENSOR <sup>1)</sup>	CE
LED FACADE EDGE 12 W 3000 K WT SENSOR <sup>1)</sup>	CE


<sup>1)</sup> Available from February 2018

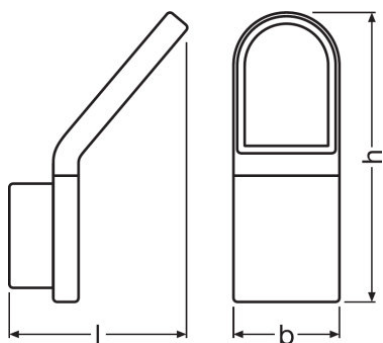


LED FACADE EDGE 12 W 3000 K GY,  
LED FACADE EDGE 12 W 3000 K WT

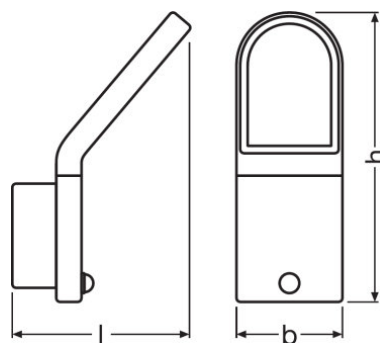


LED FACADE EDGE 12 W 3000 K GY  
SENSOR, LED FACADE EDGE 12 W 3000  
K WT SENSOR

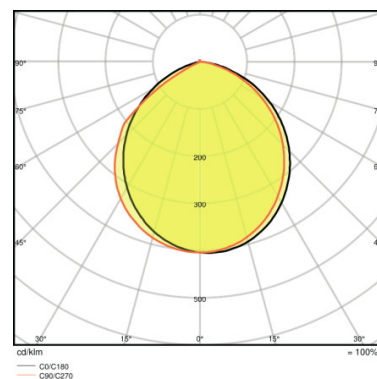


LED FACADE EDGE 12 W 3000 K GY

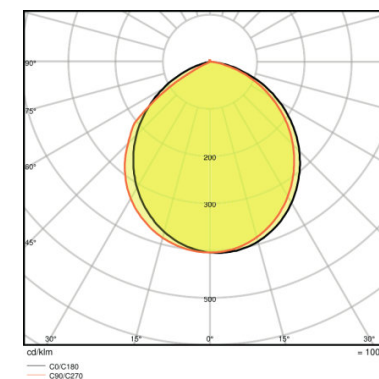

LED FACADE EDGE 12 W 3000 K WT

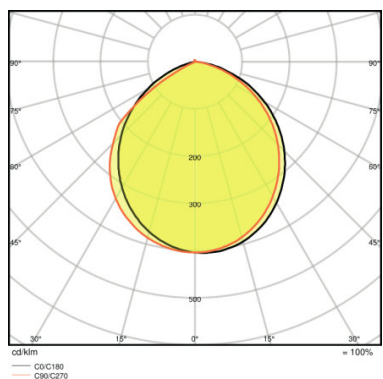

LED FACADE EDGE 12 W 3000 K GY  
SENSOR

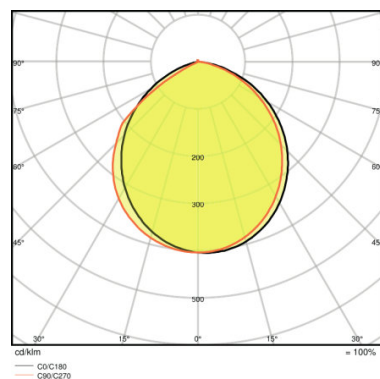

LED FACADE EDGE 12 W 3000 K WT  
SENSOR

## EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

## APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

## LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075074750	LED FACADE EDGE 12 W 3000 K GY	Shipping carton box 4	425 mm x 285 mm x 315 mm	38.15 dm <sup>3</sup>	5822.00 g
4058075074774	LED FACADE EDGE 12 W 3000 K WT	Shipping carton box 4	425 mm x 285 mm x 315 mm	38.15 dm <sup>3</sup>	5822.00 g
4058075074798	LED FACADE EDGE 12 W 3000 K GY SENSOR	Shipping carton box 4	425 mm x 285 mm x 315 mm	38.15 dm <sup>3</sup>	5822.00 g
4058075074811	LED FACADE EDGE 12 W 3000 K WT SENSOR	Shipping carton box 4	425 mm x 285 mm x 315 mm	38.15 dm <sup>3</sup>	5822.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## REFERENCES / LINKS

For Guarantee see

- ▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.